



15. 04 2004



INVESTOR IN PEOPLE

EP. 04/50324

The Patent Office  
Concept House

Cardiff Road

Newport

South Wales

NP10 8000

REC'D 27 MAY 2004

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Behan*

Dated 29 March 2004

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1 (a) OR (b).

**BEST AVAILABLE COPY**

THE PATENT OFFICE

21 MAR 2003



21MAR03 07:40:73-9 000350  
POL/7700 0.00-0306502.6

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

MG/LD/P/22679.GB

2. Patent application number

(The Patent Office will fill in this part)

0306502.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

VOITH FABRICS HEIDENHEIM GmbH & CO. KG,  
KURZE STRASSE 11,  
89522 HEIDENHEIM,  
GERMANY.

Patents ADP number (if you know it)

7841125001

If the applicant is a corporate body, give the country/state of its incorporation

GERMANY

4. Title of the invention

INDUSTRIAL FABRICS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WILSON GUNN M'CAW  
41-51 ROYAL EXCHANGE  
CROSS STREET  
MANCHESTER  
M2 7BD

Patents ADP number (if you know it)

7153927001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES.

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

✓ **Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s)

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 20.03.2003.

Nelson Gunn M'Paw

12. Name and daytime telephone number of person to contact in the United Kingdom M. GOODWIN - 0161 827 9400

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

## INDUSTRIAL FABRICS

The present invention relates to industrial fabrics, and particularly, but not exclusively, to papermachine fabrics. A preferred use of the fabrics of the present invention is as press felts for use in the press section of a papermaking machine.

5 Paper is conventionally manufactured by conveying a paper furnish, usually consisting of an initial slurry of cellulosic fibres, on a forming fabric or between two forming fabrics in a forming section, the nascent sheet then being passed through a pressing section and ultimately through a drying section of a papermaking machine. In the case of standard tissue paper machines, the paper web is transferred from the  
10 press fabric to a Yankee dryer cylinder and then creped.

Paper machine clothing is essentially employed to carry the paper web through these various stages of the papermaking machine. In the forming section the fibrous furnish is wet-laid onto a moving forming wire and water is encouraged to drain from it by means of suction boxes and foils. The paper web is then transferred to a press  
15 fabric that conveys it through the pressing section, where it usually passes through a series of pressure nips formed by rotating cylindrical press rolls. Water is squeezed from the paper web and into the press fabric as the web and fabric pass through the nip together. Press fabrics generally comprise a batt of fibres needled to a base fabric. In the final stage, the paper web is transferred either to a Yankee dryer, in the case of  
20 tissue paper manufacture, or to a set of dryer cylinders upon which, aided by the clamping action of the dryer fabric, the majority of the remaining water is evaporated.

Most papermachine clothing is nowadays made from textile materials usually comprising polymeric yarns and or fibres. In an attempt to extend the lifespan and improve the performance of these fabrics GB 1,512,558 teaches the application of a

resin coating to the fabric yarns, the resin coating being applied as a solution in organic solvent. However, the use of such solvents leads to unacceptable environmental problems. US 4,439,481 relates to a press fabric to which one of a number of suitable synthetic polymeric resins is applied. Suitable polymeric resins  
5 are said to include polyolefins, such as polyethylene, ethylene copolymers, polypropylene, polyamides, fluorinated ethylene propylene, polyvinylchloride, polyvinylidene fluoride and acrylic polymers, B-stage thermosetting resins and liner epoxy resins. In the example, a fabric is immersed in a dip tank containing epoxy resin. The coating increases the stiffness of the press fabric and makes it more  
10 resistant to compression. This enhances the performance of the fabric in removing water from the paper web. However, the use of strong organic solvents is usually required in order to dissolve the epoxy resin prior to coating the fabric. This solvent must later be removed leading once again to environmental problems.

In US 4,847,116 a press fabric is made by applying, to a base fabric, a  
15 homogeneous foam coating composed of resin particles, binder and solvent. The solvent is then evaporated by heat to fuse the resin particles to each other and to the base fabric. This method consumes considerable energy in providing the heat to evaporate the solvent.

In US 4,571,359 a layer of particles of a synthetic polymeric resin is located  
20 on a base fabric. The particles are then sintered by heating so that they bond together and with the base fabric. Again this process involves a costly treating step. A similar method is described in US 5,508,095 except in that a fabric is embedded within the sintered structure.



In US 5,508,095 a layer of plastics powder material comprising soluble corpuscles is applied to a base fabric. By heat and pressure treatment a plastics layer is produced. The soluble corpuscles are leached out from this layer to provide through flow passages. Again this process involves a costly heating step.

5 In GB 2,200,867 additives are included in the needled batt layer of a papermakers felt so as to increase the contact area with the web. These additives are prone to wear and drastically reduce the belt porosity.

The present invention seeks to provide a more efficient and less time consuming method of making industrial fabrics, such as papermachine clothing,  
10 having good abrasion resistance and smooth surface topography. The process has particular, but not exclusive, application in making papermachine clothing such as forming, press or dryer fabrics as well as for through air dryer (TAD) fabrics and other fabrics for use in the nonwovens industry. The invention has particular application in the manufacture of press felts since the improved surface topography  
15 increases the web contact area of such felts, especially in the nip and also provides improved surface fibre anchorage.

According to a first aspect of the present invention there is provided a method of making an industrial fabric comprising the steps of applying a radiation-curable powder onto the surface of a fabric, melting the powder such that the powder forms a  
20 layer on the fabric surface and directing radiation at this surface layer so as to cure the constituent material of this surface layer.

For the avoidance of doubt the term fabric used herein relates to the fabric as a whole and not, for example, in the case of press felts, just to the base fabric.

The invention enables polymeric particles to be melted and a specific surface topography to be formed before the polymeric powder is cured.

The method of the invention is advantageous in that it avoids the use of solvents, for example water or toxic volatile organic compounds (VOCs) such as dichloromethane, formaldehyde or toluene. Consequently, the process obviates the need for a costly energy consuming drying stage. Curing in the process of the invention is emission free and non toxic. Furthermore, the process may be completed quickly as melting and curing together generally taking less than 3 minutes. Also thick coating layers can be applied in a single application. A further advantage is that very little radiation curable material is wasted during the process.

The method of the invention may be used to produce either porous coatings or non-porous coatings. A non-porous coating can be achieved by applying a thick coating layer, or several subsequent coating layers on top of each other.

A porous coating can be achieved by adding a thin coating layer and/or by first wetting the fabric substrate with water or another liquid before applying the layer of UV-curable powder. Degassing by drying off the liquid will then result in pin holes forming in the film during the heating and melting stage that will form small pores in the surface.

Ultra-violet curable powder technology is based on solid polymer resins containing unsaturated groups. The crosslinking reaction is initiated by decomposition of an initiator, for example, 1-Hydroxy cyclohexyl phenyl ketone (HCPK),  $\alpha$ -hydroxy ketone (AHK) or bisacyl phosphine oxide (BAPO), contained in the powder, upon exposure to UV light, which in turn starts a free-radical polymerisation of the unsaturated groups of the resin. Typical unsaturated groups

include acrylate, methacrylate, vinyl ether, maleimide and epoxide or maleic and fumaric double bonds. Suitable UV curable powder coating compositions are known in the art, for example from US 5,558,911 and US 2002/0099127. Other examples include Uvecoat 1000 & 2100 unsaturated polyesters, Uvecoat 2000 amorphous polyester, Uvecoat 3000 an amorphous unsaturated polyester (all Ucb chemicals), XZ92478.00 an epoxy resin (Dow Chemical Company), whilst Syncryl 206 an acrylated polyester & Syncryl 306 an acrylated polyurethane (both Galstaff Resins) are other 100% active materials.

The powder is preferably applied to the fabric by electrostatically spraying the powder onto the surface of the fabric. Powder coatings can be easily applied onto textile substrates by Corona electrostatic spray guns or by tribo-charging guns. The fabric can also be preheated if necessary to aid the powder application by enabling the powder to stick to the fabric.

The powder is preferably melted by using heat. This is ideally provided by hot air at a temperature preferably in the range from 100°C to 150°C and/or by incident infrared radiation of wavelength in the range from  $10^{-6}$  to  $10^{-3}$  m (10,000 to  $10\text{ cm}^{-1}$ ).

Unlike a thermosetting powder coating, the molten UV curable powder does not start crosslinking under the influence of heat. This facilitates optimum flow out and smooth coating finishes which may be achieved at relatively low temperatures of 90°C to 140°C. As no thermal curing reaction takes place, flow of the finishes can be adjusted without affecting the reactivity of the system.

The powder is preferably cured by way of ultra-violet light of wavelength in the range from  $10^{-8}$  to  $10^{-6}$  m (10 to 1000 nm). Fast curing is achieved by a free



radical polymerisation process by exposing the coating to UV light at room temperature (18-25°C). The curing reaction with UV light is very fast (a few seconds) and proceeds at low temperatures.

Since two distinct mechanisms are involved; i.e. melting (thermal) and curing  
5 (via UV irradiation), parameters can be easily adjusted in order to optimise flow without affecting curing conditions. Thus the use of UV light for the crosslinking reaction provides a definite advantage over conventional processing of thermoset powder. Unlike conventional powder coating, separation of the powder melting and flow out stages from the subsequent UV-cure step gives UV curable powders a wide  
10 processing window.

Coating thickness can be controlled e.g. between 60-150 micron. Again, due to the fact that the melting and curing processes are two separate processes, high quality finishes with outstanding flow are achievable. This technology will also enable damaged fabrics to be repaired on papermill sites using  
15 hand-held infrared heaters and UV guns.

According to a second aspect of the present invention there is provided a method of repairing a damaged industrial fabric comprising the steps of applying a radiation-curable powder to the surface of the damaged area of the fabric, melting the powder such that the powder forms a layer within the damaged area which is  
20 continuous with the surface of the undamaged area of the fabric, and directing radiation at the melted powder so as to cure the melted powder.


In order that the present invention may be more readily understood a specific embodiment thereof will now be described by way of example only with reference to the following example.

EXAMPLE

75 gsm of Uvecoat 2100 (Ucb Chemicals) unsaturated polyester powder is electrostatically sprayed onto the surface of a conventional press fabric. The powder  
5 is then melted using infrared radiation and smoothed, whilst molten, using a non-stick roll. The molten surface is then cured by irradiating with UV light.

It is to be understood that the above described embodiment is by way of illustration only. Many modifications and variations are possible.

*Handwritten mark* EP 004050324

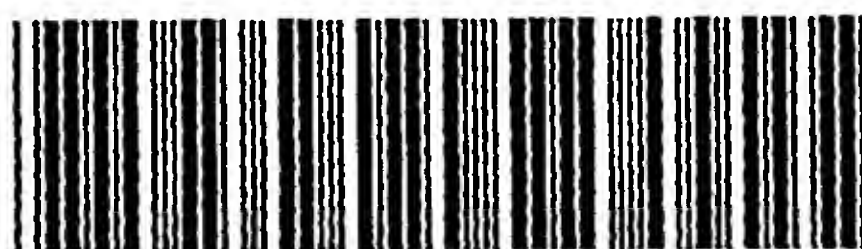

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox.**